



ATV Winch

Model: **Cub 3**

PN: 123561 12V

Introduction

► Feature

Line pull:	1,361 kg / 3,000 lb wire rope first layer
Wire rope:	4.8 mm x 15.2 m (3/16" x 50') galvanized aircraft A7 x 19
Brake:	Mechanical and dynamic brake for 100% braking
Clutch:	Turn the shifter for rapid wire rope payout
Control:	Handlebar rocker switch to power the winch

► Unpacking

- Winch assembly..... 1 pc
- Handlebar rocker switch kit..... 1 pc
- 4 way roller fairlead..... 1 pc
- Wire rope with safety hook..... 1 pc
- Colour coded wirings and 6 gauge battery lead 1 pc

► Read this manual carefully

You should carefully read and understand this manual before operating it. Careless winch operation may result in personal injury hazards or property damage.

► Information requesting or parts ordering

Please specify the followings information:


- Winch part number
- Part description
- Serial number
- Replacement part number
- Quantity for each part

Installation

Before using the winch, make sure all electrical components have no corrosion or damaged; the environment should be clear and dry.


► Wire rope replacement

- It is very important that the winch will be mounted on a flat and hard surface of mounting channel in order to make sure the motor, drum and gearbox housing are aligned correctly.
- Roller fairlead does not mount to winch directly.
- The wire rope shall be wound in an under-wound orientation only.
- Four (4) M8 x 20L 8.8 grade high tensile steel bolts must be used in order to sustain the loads imposed on the winch mounting.
- Two (2) M8 x 20L 8.8 grade high tensile steel bolts must be used for fastening the roller fairlead into the mounting channel.



► Wiring Diagram

Attach the black lead firmly to the negative (–) battery terminal and red lead to the positive (+) battery terminal. The voltage drop for the winch motor must not exceed 10% of the nominal voltage of 12V.

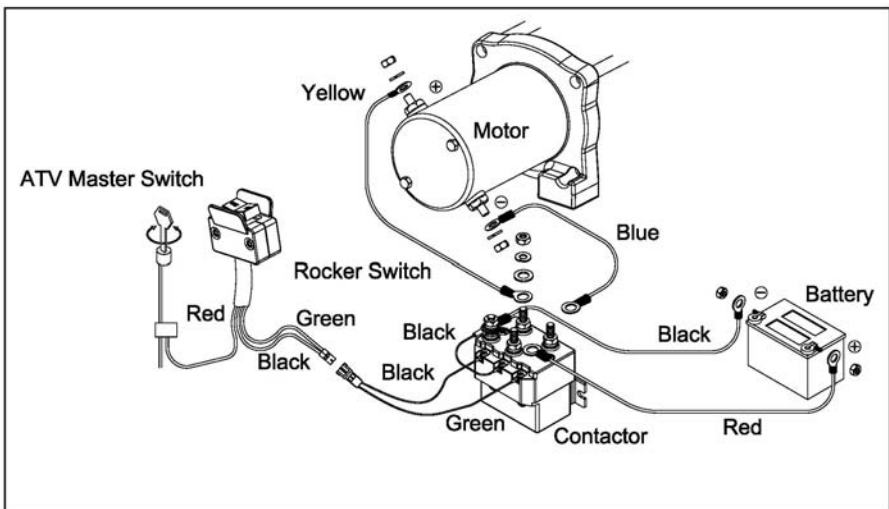


Warning

- The winch is not intended to be used in any manner for the movement or lifting of personnel.
- The pulling capacity shown is based on the first layer of rope on the drum.
- The rope winding on the drum shall remain 5 wraps from the drum.

Handlebar Rocker Switch Mounting

Handlebar mounted rocker switch can be operated without removing your hand from the grip.

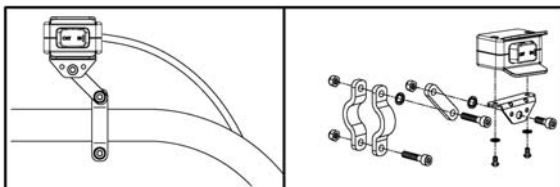

Parts List

Ver:02

Item	No.	Description	Part No.	Qty
1		Motor w/housing	881331	1
2		Motor couple kit	880988	1
3		Drum bushing	880990	2
4		Drum kit	880991	1
5		Tie bar kit	880992	1
6		Tie bar kit	880993	2
7		Gearbox support rack	880994	1
8		3 rd stage carrier	880995	1
9		2 nd stage carrier	880996	1
10		1 st stage carrier	880997	1
11		2 nd ring gear kit	880998	1
12		1 st shaft kit	880999	1
13		Gearbox kit	881000	1
14		Clutch base	881011	1
15		Friction block	881012	1
16		Clutch lever kit	881013	1
17		Shifter kit	881001	1
18		Wire rope w/hook	880230	1
19		Roller fairlead	880231	1
20		Contactor pack	881037	1
20-1		Contactor w/leads	881002	1
20-2		Battery lead (+)	880234	1
20-3		Battery lead (-)	880235	1
20-4		Motor lead (yellow)	880236	1
20-5		Motor lead (blue)	880237	1
21		Handlebar rocker switch kit	881003	1
22		Mounting hardware	881005	1
23		Handlebar hardware	880242	1
24		Handsaver strap	880026	1
25		Cable tie	880243	1

Winch Assembly

